



James Hamilton Electrical Pty Ltd (Inc in Qld) A.C.N. 010 848 389 trading as

Power Drive Systems


Generator Control Specialists

48A Ainsdale Street
West Chermerside, Qld 4032
Australia
email: info@powersystems.com.au

Telephone: 0500 800 225
Facsimile: 3350 1654
Mobile: 0427 22 00 18

P.O. Box 30
Grange, Qld 4051
Australia
www.powersystems.com.au

LG Industrial Systems Contactors

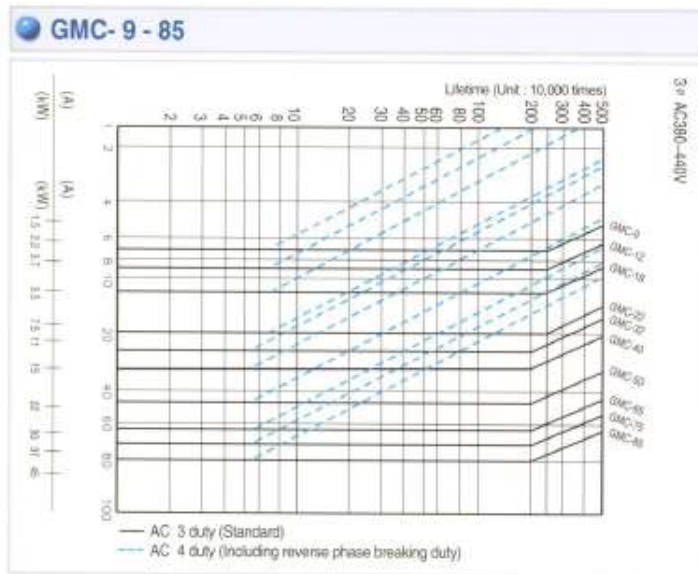

| Type | | GMC-9 | GMC-12 | GMC-18 | GMC-22 | |
|----------------|-----|--|---|---|---|---|
| Ratings | AC1 | 20A | 20A | 25A | 32A | |
| | AC3 | 200~240V 380~440V 500~550V 690V | 205kW 11A 4kW 9A 4kW 7A 4kW 5A | 3.5kW 13A 5.5kW 12A 7.5kW 12A 7.5kW 9A | 4.5kW 18A 7.5kW 18A 7.5kW 13A 7.5kW 9A | 5.5kW 22A 11kW 22A 15kW 22A 15kW 18A |

Continuous Current

UL

| | | | 20A | 25A | 30A | 32A |
|-------------|--------------|------|--------|--------|-------|--------|
| Motor AC | Single Phase | 115V | 0.5 HP | 0.5 HP | 1 HP | 2 HP |
| | | 230V | 1 HP | 2 HP | 3 HP | 3 HP |
| Three Phase | | 200V | 2 HP | 3 HP | 5 HP | 7 HP |
| | | 230V | 2 HP | 3 HP | 5 HP | 7.5 HP |
| | | 460V | 5 HP | 7.5 HP | 10 HP | 10 HP |
| | | 575V | 7.5 HP | 10 HP | 15 HP | 15 HP |